

## Main Applications:

- ◆ Seals the back of waterproof fabrics after embroidery. Ideal for outdoor jackets or work clothes.

### Care:




## Processing Recommendations:

- ◆ Remove stabilizer after embroidery process from waterproof or water-resistant fabric.
- ◆ Cut a piece of TS 2-3 cm larger than the embroidery design.
- ◆ Place TS onto wrong side of embroidered fabric, adhesive side facing down (the adhesive coating faces out on roll, slightly glossy look).
- ◆ Seal with heat press  
 Temperature 130°C – 150°C  
 Pressure medium pressure  
 Time 10 – 15 sec.
- ◆ For maximum adhesion, allow TS to set for 48 hours after pressing, before administering any washing tests.

### TIP:

Testing is necessary to ensure the adhesiveness of the film. Just press a small piece of TS to the back of the fabric before embroidering. If the film sticks to the fabric, start with the described process.

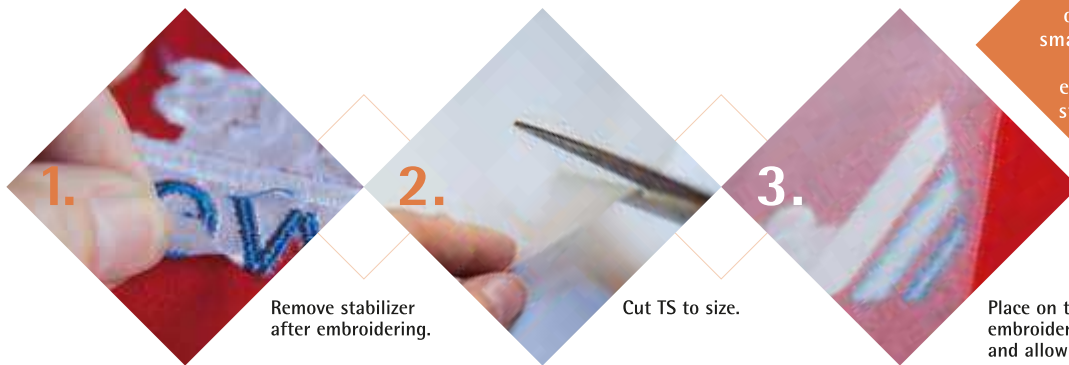

## Technical Information:

- ◆ Substance: 100 % PU
- ◆ Colour: transparent
- ◆ Thickness: 0,19 mm
- ◆ Make-up:  
 rolls 50 cm x 10 m  
 25 cm x 10 m
- ◆ Dispatch and packing size:  
 1 single roll



Professional materials for high-quality embroidery results – tried and tested in the clothing, promotion and home textile industries. For more information visit our website [www.gunold.de](http://www.gunold.de)!

Distributed by:

# GUNOLD®

